

Electromagnets range U

Electromagnet for flush installation


[Website](#)


CHARACTERISTICS

- For use when there is not much space available between door and wall or when the magnet should be as discrete as possible
- Installed in a standard flush box (provided by the customer). The white plastic front plate covers the flush box completely
- Equipped with a spark extinction diode as standard: in case of faulty connection, the integrated polarity protection prevents the spark extinction diode from being destroyed
- As counter piece for the electromagnet, a counter plate has to be fixed on the door
- All electromagnets with 'LE 07016' in their description have been tested according to EN 1155
- Some articles may differ from the photo



DIMENSIONS

All dimensions in mm

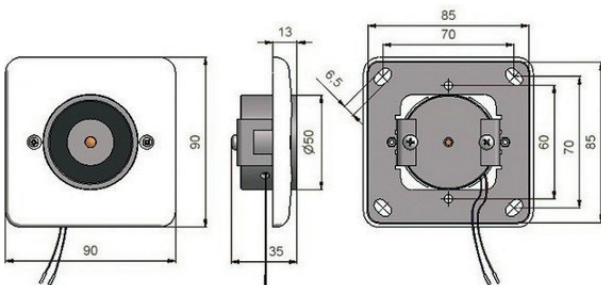

TECHNICAL DATA

Voltage	24 VDC +/-10 %
Power consumption	67 mA (1.6 W)
Temperature range	-20 °C to +60 °C
Surface	zinc-plated
Casing	white plastic cover
Holding force	600 N
Remanence	0 N
Duty cycle	100 %

INSTALLATION


[Installation instructions](#)

ORDER INFORMATION

Description	Part no.
Electro magnet EM GD 50 U 35, LE 07016	041011