

DICTATOR VS 2000 Door Check

Top-of-the-Range Model

The top-of-the-range DICTATOR door check is the VS 2000. It is also suitable for heavy doors.

The VS 2000 is easy to install due to its patented fixing system with integrated hinged mounting plate. All fixing elements are hidden, so the hook and slimline body form an aesthetically pleasing unit.

The VS 2000 door damper is usually mounted vertically in the centre of the door face. By default, the versions with 20 N, 35 N or 50 N, however, can also be mounted horizontally.

The door damper VS 2000 is in particular for overlapping and flush doors. To make up for the height difference between door leaf and frame every door check comes with 3 plastic spacers of different thicknesses for the hook.

By default the VS 2000 is chrome or colour coated, a stainless steel version is not available.


For narrow steel door frames special fixing plates to weld on are available, and for thin-walled steel doors large mounting plates.



Technical Data

Types of doors	left and right operating, overlapping and flush doors
Closing force	20, 35, 50, 80 or 115 N (measured on the door check)
Damping characteristics	progressive, adjustable closing speed
Damping fluid	silicone oil, almost independent of temperature
Mounting possibilities	vertically or horizontally (20 N and 50 N by default)
Components included	door check, hook, 3 plastic plates for the hook, screws
Finish	polished and satin chrome, golden, colour coated
Recommended accessories	Piccolo or concealed jamb closer closing spring


Mounting

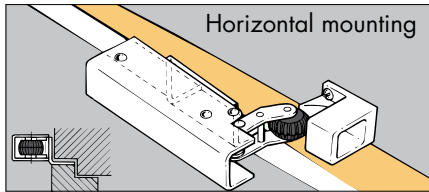

The VS 2000 DICTATOR door damper is vertically fixed with its pivoting base plate, usually in the centre of the upper door leaf. The hook is at the correct height when the rubber roller on the bent lever only just touches the front edge of the hook when closing. Important: with overlapping doors the plastic plates must be used to compensate for a height difference between body and hook.

For the horizontal mounting special mounting brackets or plates are available (see page 02.024.00). But you don't need a mounting plate/bracket if the door check is mounted right at the closing edge of the door. In this case usually a model with a 35 N spring is chosen.

Dimensions

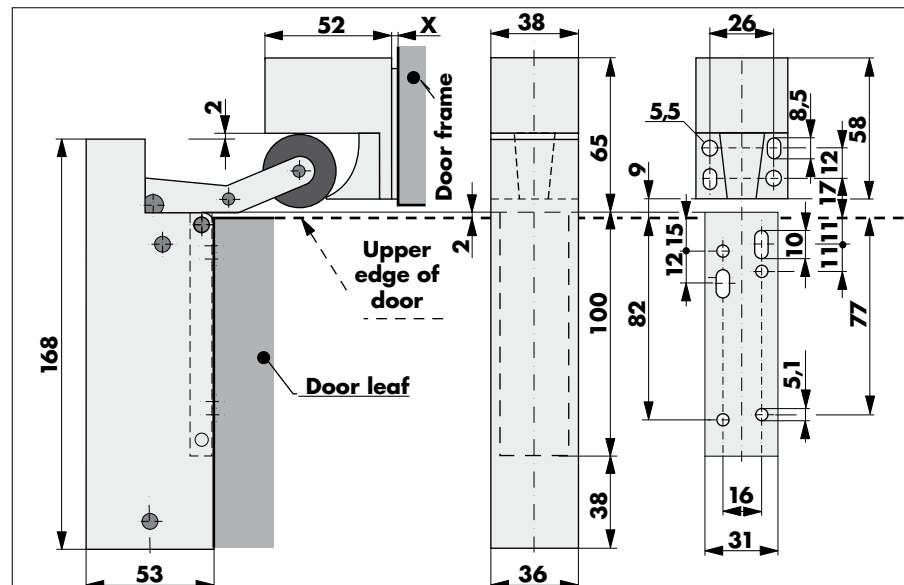

Dimension X: With overlapping doors the small plates (2 mm, 3 mm and 10 mm thick) compensate for a height difference of 2-15 mm between door and frame.

Order Information

(Further types on request)

VS 2000 door check, hook 1020						
Force	polished chrome	satin chromed	RAL 9010 white	RAL 8017 brown	RAL 9005 black	golden shining
20 N	300575	300575X	300520	300556	**	**
35 N	300570	300570X	**	**	**	**
50 N	300500	300500X	300511	300525	300516	300513
80 N	300550	300550X	300554	**	**	**
115 N	300560	300560X	300564	**	**	**

** On demand

Mounting Accessories

For the mounting of the VS 2000 different mounting plates and brackets are available. Please see Mounting Plates and Brackets for Door Checks beginning on page 02.021.00.