

RZ-24 combi-pack for ATEX hold-open systems

Housing incl. power supply unit RZ-24 with integrated release device for ATEX hold-open systems


CHARACTERISTICS

- Combines the RZ-24 control unit with the required additional components for the installation of a DICTATOR ATEX hold-open system pre-wired in one single housing
- Installed outside the hazardous area
- Connection of external components, such as electromagnets, fire detectors and manual release pushbuttons, is made directly via terminals on a top-hat rail
- Fast and uncomplicated installation thanks to the compact, pre-wired unit with removable cover
- Direct connection of all external components to the terminal strip reduces the risk of errors during installation
- Designed for 1- or 2-leaf hinged doors
- For use with sliding gate operators that allow hold-open in any position, only the automatic reset board needs to be replaced by the remote control adapter (part no. 040560)



COMPONENTS (PREWIRED)

- Power supply unit with integrated release device RZ-24 and automatic reset after power failure and fire alarm
- Zener barrier Z779
- 2x fuse holder incl. fuse for ATEX-rated electromagnets (200 mA 5x20 type M)
- Terminals on top hat rail
- Special housing 284 x 364 x 160 mm

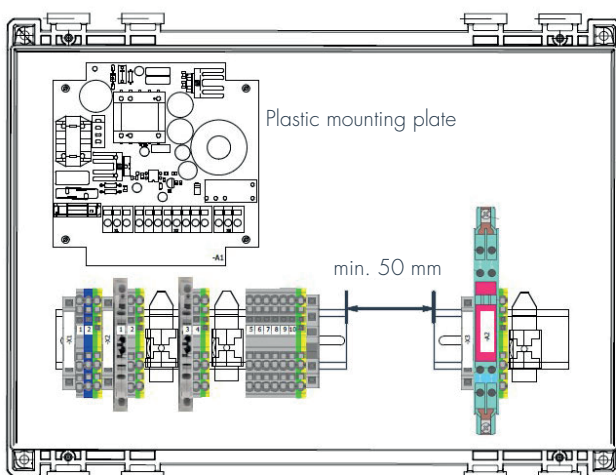

DIMENSIONS

All dimensions in mm

